

DESCRIPTION

The polyester enhances the mechanical strength of the media to compensate for the fragility of wet viscose.

It maintains good permeability, with its filtration performance depending on the cake formed on the media.

A technically interesting product, suitable for both neat oil and emulsions.

Sufficient mechanical strength for use on all types of gravity filters.

ORDER REFERENCE

Example :

QBAND -VPEF - **A** 50 - **B** 500 - **C** 90

A / Weight

Code	Weight	Thickness	Air Permeability	Nominal Filtration Threshold
50	50 gm/m ²	0,38 mm	1100 l/(m ² -s) @ 50 Pa	35 µm
66	66 gm/m ²	0,51 mm	2900 l/(m ² -s) @ 200 Pa	25 µm
90	90 gm/m ²	0,65 mm	2350 l/(m ² -s) @ 200 Pa	10 µm

B / Width of web

Code	Width
500	500 mm
700	700 mm
710	710 mm
1000	1000 mm
1300	1300 mm
1500	1500 mm
1800	1800 mm

Other widths available upon request

Material

Viscose / Polyester

BAND FILTER COMPATIBILITY

- GRAVITY FLAT
- HYDROSTATIC
- COMPACT DRUM
- PRESSURE BELT

> 90g/m²
- VACUUM BELT

> 90g/m²

C / Length

Code	Length
100	100 m
250	250 m

Other lengths available upon request





How to choose the right filter paper for your industrial process?



Filtration threshold (µm)

70 65 60 55 50 45 40 35 30 25 20 15 10 5

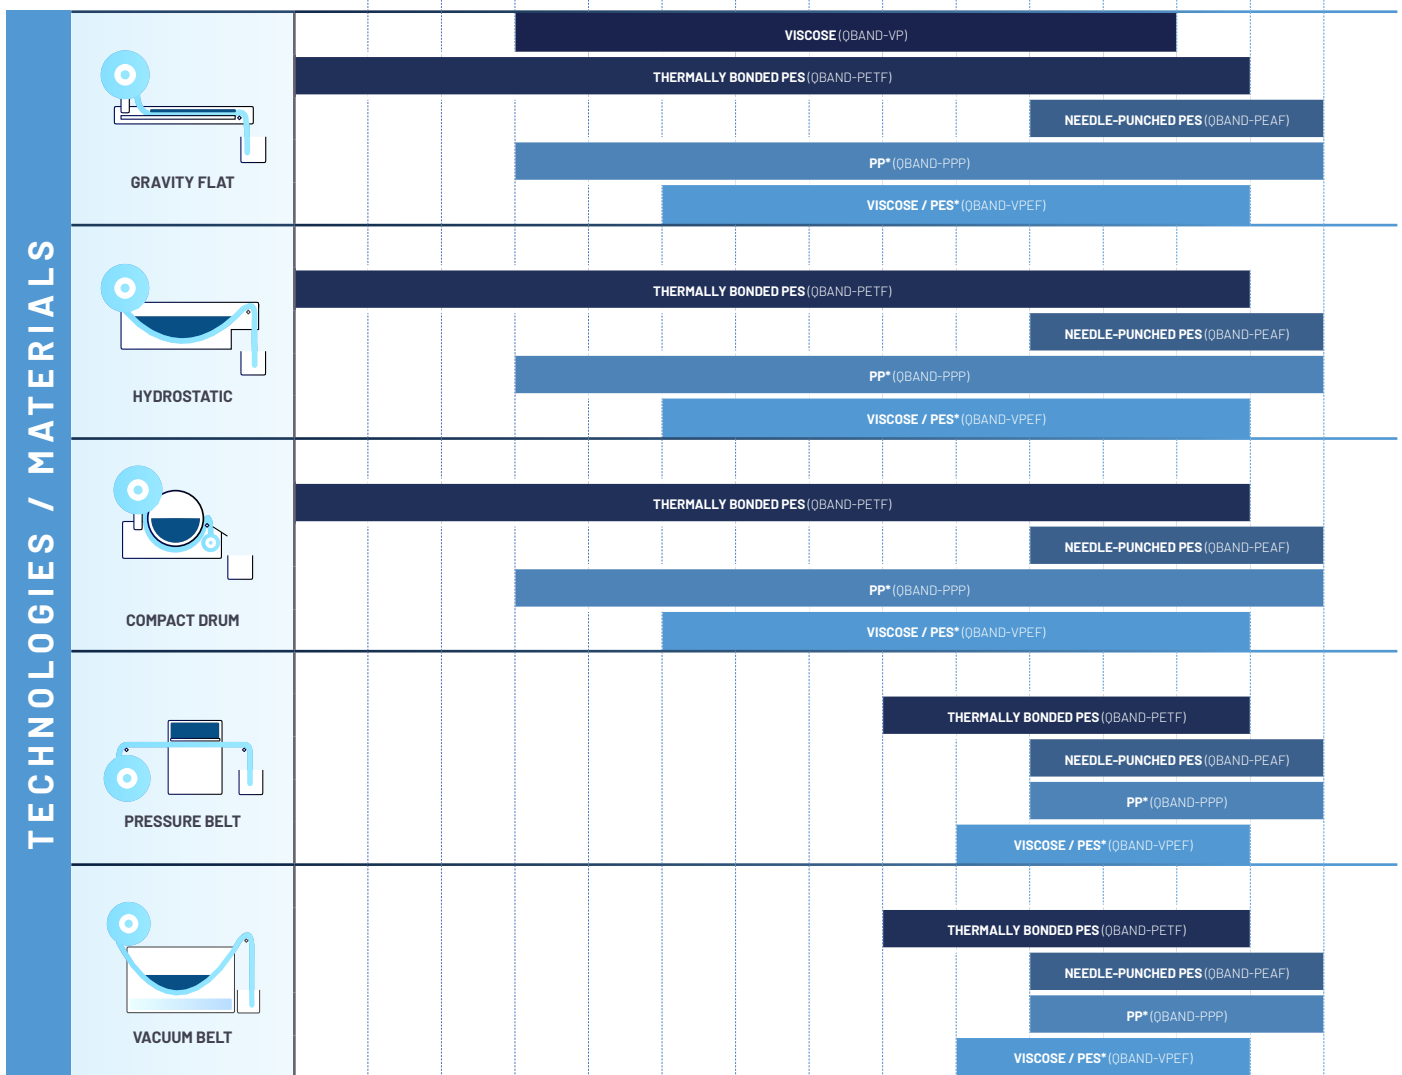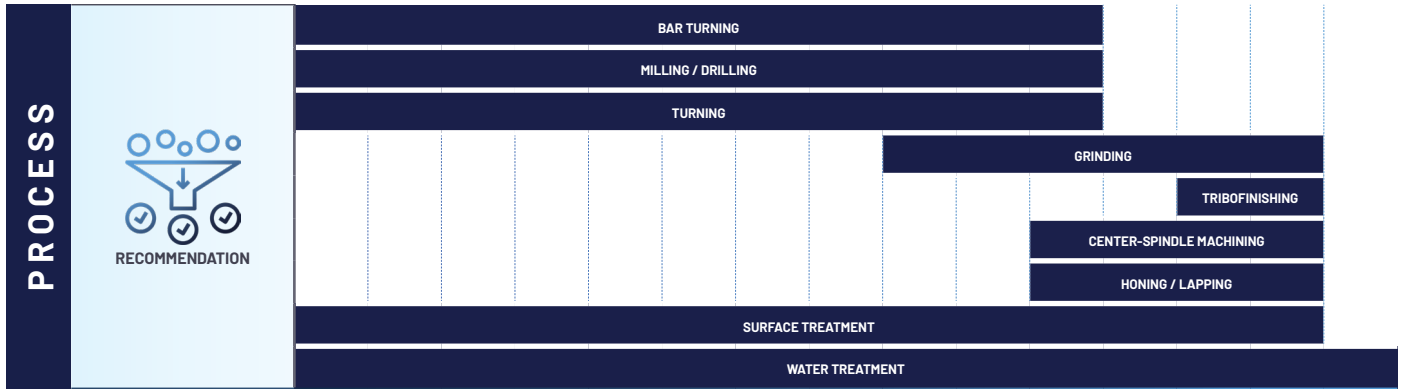

* PES = Polyester / PP = Polypropylene

70 65 60 55 50 45 40 35 30 25 20 15 10 5

